

# Dual output sensor

## 786T

### SPECIFICATIONS


|                                            |                  |                                    |
|--------------------------------------------|------------------|------------------------------------|
| Sensitivity, $\pm 5\%$ , 25°C              |                  | 100 mV/g                           |
| Acceleration range, VDC > 25 V             |                  | 80 g peak                          |
| Amplitude nonlinearity                     |                  | 1%                                 |
| Frequency response:                        | $\pm 5\%$        | 3 - 5,000 Hz                       |
|                                            | $\pm 10\%$       | 1 - 7,000 Hz                       |
|                                            | $\pm 3$ dB       | 0.5 - 12,000 Hz                    |
| Resonance frequency                        |                  | 30 kHz                             |
| Transverse sensitivity, max                |                  | 5% of axial                        |
| Temperature response:                      | -25°C            | -10%                               |
|                                            | +120°C           | +10%                               |
| Temperature sensor:                        |                  |                                    |
| Output sensitivity                         |                  | 10 mV/°C                           |
| Measurement range                          |                  | 2° to 120°C                        |
| Power requirement:                         |                  |                                    |
| Voltage source                             |                  | 18 - 30 VDC                        |
| Current regulating diode                   |                  | 2 - 10 mA                          |
| Electrical noise, equiv. g:                |                  |                                    |
| Broadband Spectral                         | 2.5 Hz to 25 kHz | 700 $\mu$ g                        |
|                                            | 10 Hz            | 10 $\mu$ g/ $\sqrt{\text{Hz}}$     |
|                                            | 100 Hz           | 5 $\mu$ g/ $\sqrt{\text{Hz}}$      |
|                                            | 1,000 Hz         | 5 $\mu$ g/ $\sqrt{\text{Hz}}$      |
| Output impedance, max                      |                  | 100 $\Omega$                       |
| Bias output voltage, nominal               |                  | 12 VDC                             |
| Grounding                                  |                  | case isolated, internally shielded |
| Temperature range                          |                  | -50° to +120°C                     |
| Vibration limit                            |                  | 500 g peak                         |
| Shock limit                                |                  | 5,000 g peak                       |
| Electromagnetic sensitivity, equiv. g, max |                  | 70 $\mu$ g/gauss                   |
| Sealing                                    |                  | hermetic                           |
| Base strain sensitivity, max               |                  | 0.0002 g/ $\mu$ strain             |
| Sensing element design                     |                  | PZT, shear                         |
| Weight                                     |                  | 90 grams                           |
| Case material                              |                  | 316L stainless steel               |
| Mounting                                   |                  | 1/4-28 UNF tapped hole             |
| Output connector                           |                  | 3 pin, MIL-C-5015 style            |
| Mating connector                           |                  | R6GW                               |
| Recommended cabling                        |                  | J9T3A                              |

Accessories supplied: SF6 mounting stud; calibration data (level 2)



### Key features

- Accelerometer with internal temperature sensor
- Certified versions available for use in hazardous areas
- Manufactured in ISO 9001 facility

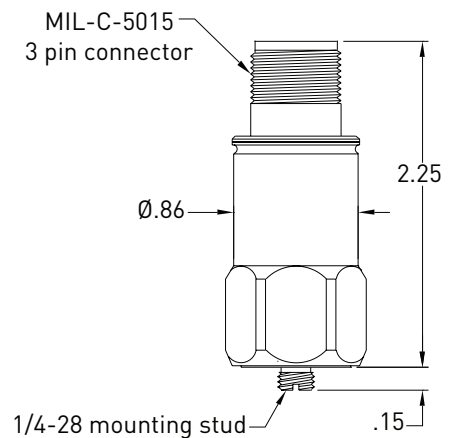

| Connections                          |               |
|--------------------------------------|---------------|
| Function                             | Connector pin |
| accelerometer power / signal         | A             |
| accelerometer and temp sensor common | B             |
| temp sensor signal                   | C             |
| ground / case                        | shell         |



Note: Due to continuous process improvement, specifications are subject to change without notice.  
This document is cleared for public release.